

POWERSUPPLIES



GS60, Switching adapter 60W

- ErP & CEC efficiency regulation compliance
- Very high MTBF value >711 000h
- No load power consumption <0.3W
- LED indication
- International approvals
- 2 year warranty

Technical data:


Input:

Input voltage: 90-264VAC, 127-370VDC, IEC320-C14
Frequency: 47-63 Hz
Input current max: 1.0A/230VAC
Inrush current max: 65A/230VAC

Output:

Output voltage: See below table
Output current: See below table
Line regulation 90-264V: +/-1%
Load regulation 0-100% load: +/-2.5-5%
Ripple: 100-240mVp-p
Efficiency: 81-92%
Protection: Overload, over voltage and over temperature
Temperature range: -30°C...+60°C@100% load, +60°C@50% load
Plug and cable: 1.0m cable AWG16 for 5-15V, 1.8m 18AWG for 18-48V
2.1x5.5mm plug, other DC upon request
Size: 125x50x31.5mm
Weight: 305g
Safety and EMC: UL/cUL/TÜV/PSE/CCC/BSMI/CB/FCC/CE

Dimensions:

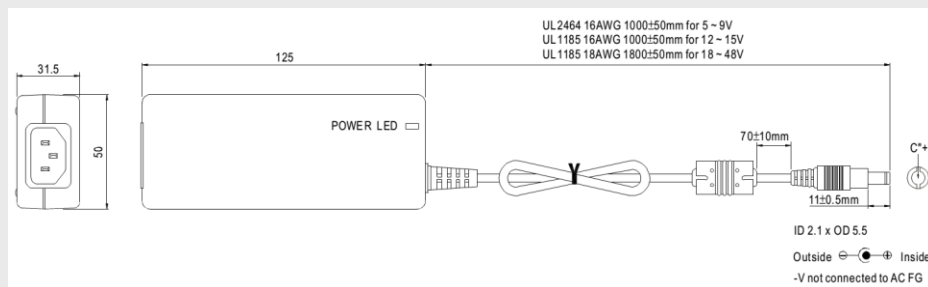

Ordering information:

Type	Power	Output voltage	Max current
GS60A05-P1J	30 W	5 VDC	6.00 A
GS60A07-P1J	45 W	7.5 VDC	6.00 A
GS60A09-P1J	54 W	9 VDC	6.00 A
GS60A12-P1J	60 W	12 VDC	5.00 A
GS60A15-P1J	60 W	15 VDC	4.00 A
GS60A18-P1J	60 W	18 VDC	3.33 A
GS60A24-P1J	60 W	24 VDC	2.50 A
GS60A48-P1J	60 W	48 VDC	1.25 A