

MOTOR

Asynchronous motor PA, 34-180 W




- IP65 according to EN 60529 as standard
- High torque – Compact size
- Long life time – High quality
- Encoder and brake as option
- CSA approved file no. 226757

Technical data:


Voltage:	115 - 400 VAC/ 50 - 60 Hz
Output power:	34 - 180 W
Rated torque:	1,1 - 20 Nm
Output speed:	3,7 - 432 rpm
Current:	19 - 1,03 A
Approvals:	CE, cCSAus

Dimensions:

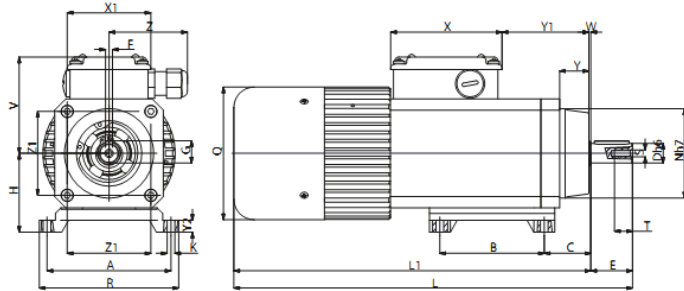

B3

Typ	A	B	C	D	E	F	G	H	K	L	L1	N	Q	R	S	T	V	X	X1	Y	Y1	Y2	W	Z	Z1	Weight kg
PA...M2	89	75	33	14	30	5	16,3	56	5,5	286	256	64	95	100	M5	13	71	80	60	21	64	9	1,5	56	60	4,215
PA...M3	89	75	33	14	30	5	16,3	56	5,5	311	281	64	95	100	M5	13	71	80	60	21	64	9	1,5	56	60	4,940

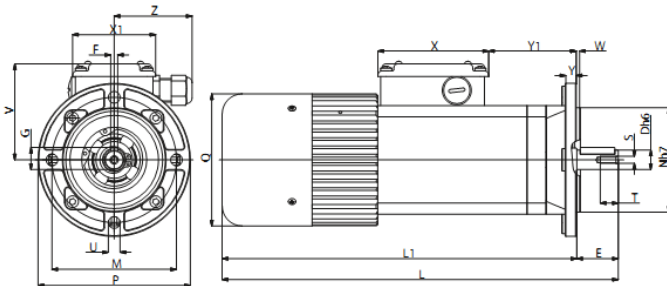

B5

Typ	D	E	F	G	L	L1	M	N	P	Q	S	T	U	V	X	X1	Y	Y1	W	Z	Weight kg
PA...M2	14	30	5	16,3	286	256	90	75	110	95	M5	13	8,5	71	80	60	10,5	65	3	56	4,245
PA...M3	14	30	5	16,3	311	281	90	75	110	95	M5	13	8,5	71	80	60	10,5	65	3	56	4,970

Order information:

The range offers more models than you can find here. Please contact us for more information.