

# MOTOR

## Asynchronous motor PCE, 44-270 W




- IP65 according to EN 60529 as standard
- High torque – Compact size
- Long life time – High quality
- Encoder and brake as option
- CSA approved file no. 226757

### Technical data:


Voltage:	115 - 400 VAC/ 50 - 60 Hz
Output power:	44 - 270 W
Rated torque:	10,4 - 90 Nm
Output speed:	3 - 84 rpm
Current:	0,34 - 1,5 A
Approvals:	CE, CCS AUs

### Dimensions:

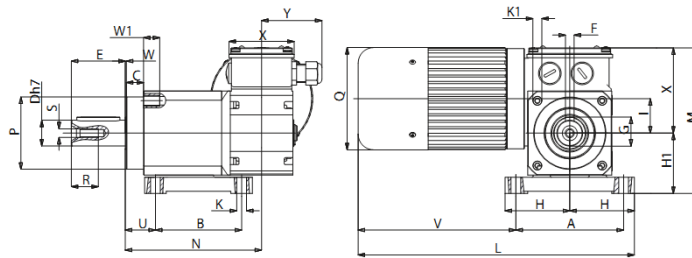

### B3/S

Typ	A	B	C	D	E	F	G	H	H1	K	K1	I	L	M	N	P	Q	R	S	T	U	V	W	W1	X	Y	Weight kg
PCE...M3	100	80	16	24	50	8	27	60	56	9	M10	32	257	136	127	67	95	22	M8	15	28	147	1	15	80	56	7,240
PCE...M4	100	80	16	24	50	8	27	60	56	9	M10	32	287	136	127	67	95	22	M8	15	28	177	1	15	80	56	8,340

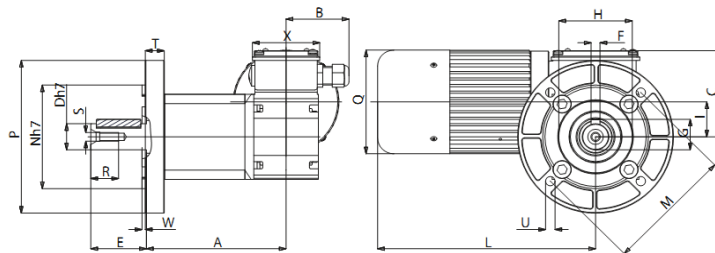

### B5/S

Typ	A	B	C	D	E	F	G	H	I	L	M	N	P	Q	R	S	T	U	W	X	Weight kg
PCE...M3	127	56	80	24	50	8	27	67	32	197	115	95	140	95	22	M8	17	9	3	60	7,000
PCE...M4	127	56	80	24	50	8	27	67	32	227	115	95	140	95	22	M8	17	9	3	60	7,900

### Order information:

The range offers more models than you can find here. Please contact us for more information.