

POWERSUPPLIES

PUE08WCP, Switching adapter 8W for medical use and changeable AC plug



- Certified according to EN60601-1 and UL60601
- ErP & CEC efficiency regulation compliance
- Power on indication
- Changeable AC plugs

Technical data:


Input:

Input voltage: 90-264VAC
 Frequency: 47-63 Hz
 Input current: 400mA at 240VAC
 Leakage current: 100uA max

Output:

Output voltage: See below table
 Output current: See below table
 Line/load regulation: +/-5%
 Ripple&noise: <150mV
 Efficiency: >70%
 Temperature range: 0°C...+40°C
 Protection: Short circuit and over voltage protection
 Plug and cable: 1.8m/6ft cable UL2468, 24AWG.
 All kind of DC plugs are available
 Size: Se nedan måttskiss
 Weight: 90g for adapter, EU plug 17g, USA plug 10g
 UK plug 27g and Australia plug 15g.
 Safety and EMC: cUL/TÜV/Ctick/PSE/CCC/CE

Mechanical drawing:

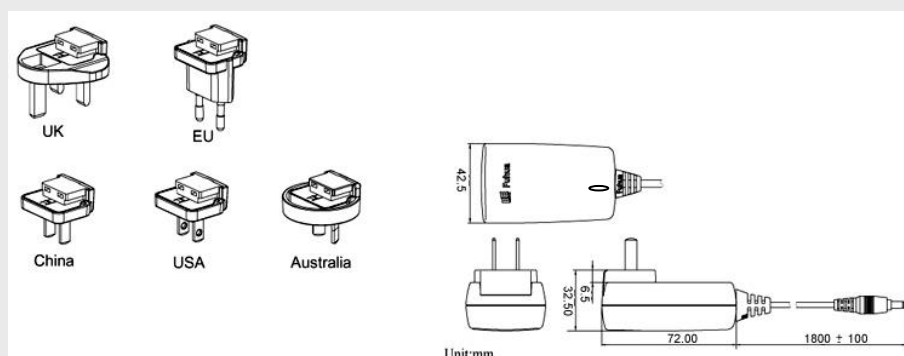

Ordering information:

Type	Power	Output voltage	Output current
PUE08WCP-060XXXSPA	8 W	6 VDC	0.10-1.33 A
PUE08WCP-075XXXSPA	7.8 W	7.5 VDC	0.10-1.05 A
PUE08WCP-090XXXSPA	7.9 W	9 VDC	0.10-0.88 A
PUE08WCP-120XXXSPA	7.9 W	12 VDC	0.10-0.66 A
PUE08WCP-138XXXSPA	7.9 W	13.8 VDC	0.10-0.57 A
PUE08WCP-150XXXSPA	8 W	15 VDC	0.10-0.53 A
PUE08WCP-180XXXSPA	7.9 W	18 VDC	0.10-0.44 A

For complete adapter, AC plug and type of DC plug with polarity must be specified. XXX = output current