

# POWERSUPPLIES

## ***PUE15WCP, Switching adapter 15W for medical use and changeable AC plug***



- Certified according to EN60601-1 and UL60601
- ErP & CEC efficiency regulation compliance
- Low standby power 0.3W
- Compact size

### **Technical data:**


#### **Input:**

Input voltage: 90-264VAC  
 Frequency: 47-63 Hz  
 Input current: 400mA at 240VAC  
 Leakage current: 100uA max

#### **Output:**

Output voltage: See below table  
 Output current: See below table  
 Line/load regulation: +/-5%  
 Ripple&noise: 50-200mV  
 Efficiency: >60%  
 Temperature range: 0°C...+40°C  
 Protection: Short circuit and over voltage protection  
 Plug and cable: 1.8m/6ft cable UL2835, 22AWG.  
 All kind of DC plugs are available  
 Size: 42.5x72x26mm  
 Weight: 120g  
 Safety and EMC: UL/TÜV/Ctick/PSE/CCC/CE

### **Mechanical drawing:**

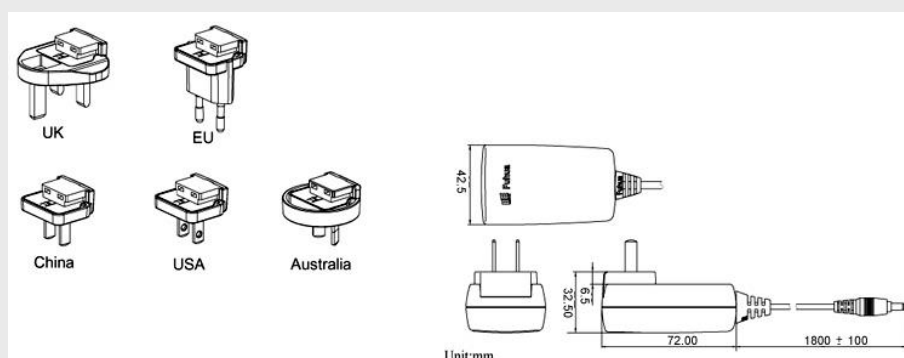

### **Ordering information:**

Type	Power	Output voltage	Output current
PUE15WCP-030XXXSPA	6 W	3 VDC	0.10-2.00 A
PUE15WCP-033XXXSPA	6.6 W	3.3 VDC	0.10-2.00 A
PUE15WCP-050XXXSPA	10 W	5 VDC	0.10-2.00 A
PUE15WCP-060XXXSPA	12 W	6 VDC	0.10-2.00 A
PUE15WCP-075XXXSPA	11.25 W	7.5 VDC	0.10-1.50 A
PUE15WCP-090XXXSPA	11.7 W	9 VDC	0.10-1.30 A
PUE15WCP-120XXXSPA	15 W	12 VDC	0.10-1.25 A
PUE15WCP-138XXXSPA	13.8 W	13.8 VDC	0.10-1.00 A
PUE15WCP-150XXXSPA	13.5 W	15 VDC	0.10-0.90 A
PUE15WCP-180XXXSPA	14.4 W	18 VDC	0.10-0.80 A
PUE15WCP-240XXXSPA	15 W	24 VDC	0.10-0.63 A

For complete adapter, AC plug and type of DC plug with polarity must be specified. XXX = output current