Alles außer Stillstand.

Worm Gear SN31 with motor M48

- *Grease lubrication for life*
- *Low noise*
- *Withstands high axial and radial forces*

Technical data:

Max continuous torque:	4,0 Nm
Max torque (short duty):	8,0 Nm
Recommended input-speed:	< 3000 rpm
Permissible axial load:	200 N
Permissible radial load:	600 N
Efficiency:	46 - 84 %
Temperature range:	- 30…+ 80 °C
Backlash unloaded:	< 0,5 degree

Dimensions:

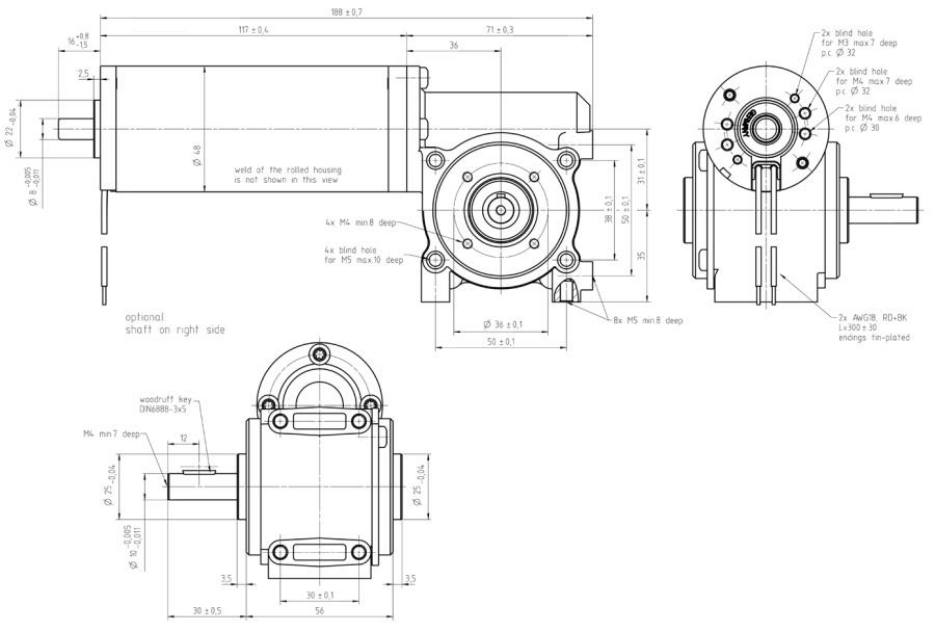

Ratio i=x:1	Rpm	M48x25/I Continuous torque Ncm	M48x50/I Continuous torque Ncm	M48x60/I Continuous torque Ncm
10	300	42	84	126
15	200	54	108	162
38*	79	87	175	262

*Bronze worm gear

Order information:

Please contact us for more information and article number.

Powermec AB, Bergkallavagen 27B
192 79 Sollentuna, Sweden

Powermec

Tel +46 8 4443650, Fax +46 8 6268450
www.powermec.se, info@powermec.se